



Connecto® I Sand shallow channel – Outside width 130 mm - with PVC grating sand color class A15

Code: CAB510APS



EN1433

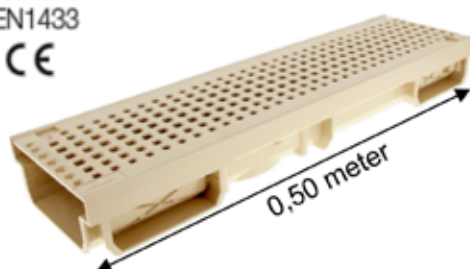

FUNCTION:

The drainage channel is designed to drain run-off water. In accordance with EN1433 standard and the marking it can be used in private areas for all building applications, the environment of home, parks and gardens in class **A15**.

DESCRIPTION:

It consists of:

- an injected PVC body in sand colour with male/female interlocking system
- one PVC grating sand class A15

ACCESSORIES:

The network connection can be realized thanks to the following PVC accessories:

- end cap/end or lateral outlet Ø 40: NAH773S
- vertical outlet Ø 100 or 110: STCAN or SVCAN
- sump unit with outlet Ø 100 or 110: PSCVT or PSCVV



STCAN
SVCAN



NAH773S



PSCVT
PSCVV


CHARACTERISTICS:

Resistance class: A15
Effective width: 98 mm
Effective depth: 34 mm
Grating type: PVC sand
Drainage surface: 232 cm²/ml
Hydraulic section: 33 cm²
Opening dimensions: less than 8 mm
Weight: 1,2 kg



IMPLEMENTATION:

1. The channel body makes it possible to carry out 90° angles by interlocking.
2. See the scheme opposite

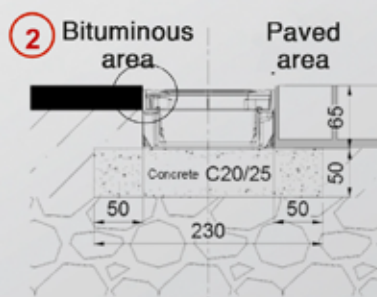

QUALITY - ENVIRONMENT:

ISO 9001
ISO 14001
ISO 50001
BUREAU VERITAS
Certification



DATE: February 2016