

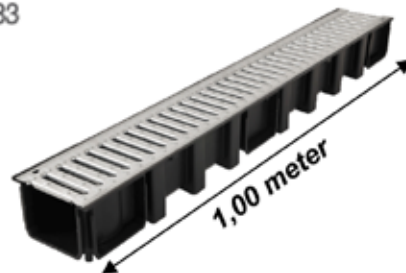


Connecto® I Channel - Outside width 130 mm - with slotted galvanized steel grating class A15

Code: DRP178



EN1433


Bottom view

Side view


FUNCTION:

The drainage channel is designed to drain run-off water. In accordance with EN1433 standard and the CE marking, it can be used in private areas for all building applications, the environment of home, parks and gardens in class A15.

DESCRIPTION:

It consists of:

- an injected polypropylene body in black colour with male/female interlocking system
- one slotted galvanized steel grating class A15


 STCAN
SVCAN

 NAT178
NAV178

 PSCVT
PSCVV


ACCESSORIES:

The network connection can be realized thanks to the following PVC accessories:

- end cap/end or lateral outlet Ø 100 or 110: NAT178 or NAV178
- vertical outlet Ø 100 or 110: STCAN or SVCAN
- sump unit with outlet Ø 100 or 110: PSCVT or PSCVV

CHARACTERISTICS:

Resistance class: A15
 Effective width: 98 mm
 Effective depth: 83 mm
 Grating type: Galvanized steel
 Drainage surface: 260 cm²/ml
 Hydraulic section: 81 cm²
 Opening dimensions: 9 / 82 mm
 Weight: 2,8 kg

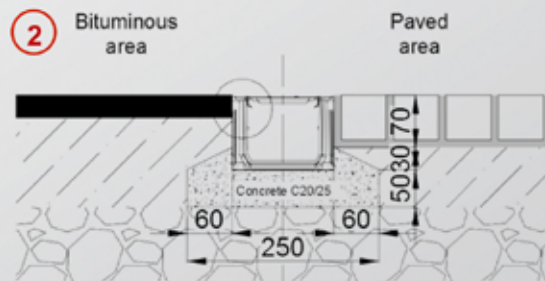

IMPLEMENTATION:

1. The channel body makes it possible to carry out 90° angles by interlocking.
2. See the scheme opposite

QUALITY - ENVIRONMENT:

 ISO 9001
 ISO 14001
 ISO 50001
 BUREAU VERITAS
 Certification


DATE: August 2015