
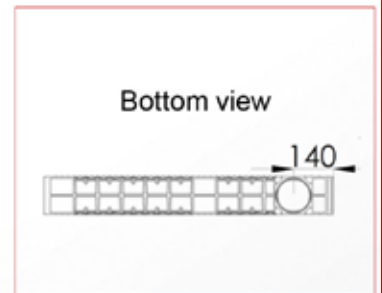
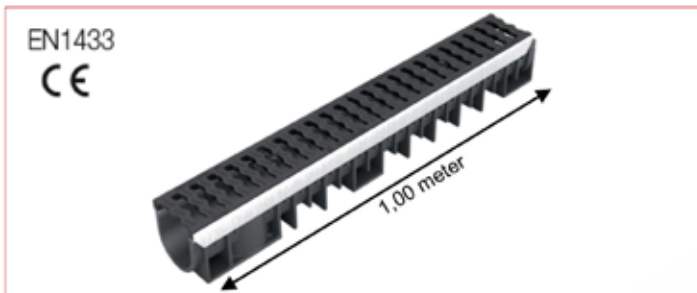



# Kenadrain | Channel 100mm wide with ductile iron gratings class C250 – Height 1

Code: DR101CF



## FUNCTION:

The drainage channel is designed to drain run-off water. In accordance with EN1433 standard and the CE marking, it can be used in public area in class C250.

## DESCRIPTION:

It consists of:

- an injected recycled polypropylene black body
- two galvanized steel edges
- two ductile iron gratings class C250
- 1 screw per grating on galvanized locking bar

## ACCESSORIES:


To connect the channels to the underground network:

- end cap/end outlet Ø50 – NPDR100
- vertical outlet Ø100, 110 or 125 – STDR10, SVDR10 or SXDR10
- sump unit with outlet Ø110 or 125 – PS100V or PS100X



## CARACTERISTICS:

- Resistance class: C250
- Effective width: 98 mm
- Effective depth: 92 mm
- Grating type: Ductile iron
- Drainage surface: 392 cm<sup>2</sup>/ml
- Hydraulic section: 83 cm<sup>2</sup>
- Opening dimensions: 18 / 96 mm
- Weight: 11.0 Kg

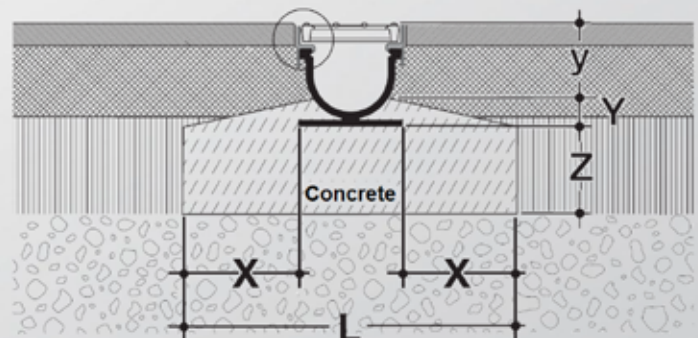

## IMPLEMENTATION:

- X = 150 mm; L = 440 mm
- Z = 150 mm; Y = 50 mm; y = 85 mm

## QUALITY - ENVIRONMENT:

ISO 9001  
ISO 14001  
ISO 50001  
BUREAU VERITAS  
Certification



DATE: September 2014